


A1501 87439 CONNECTOR

1.50mm Pitch/Disconnectable Crimp style connectors

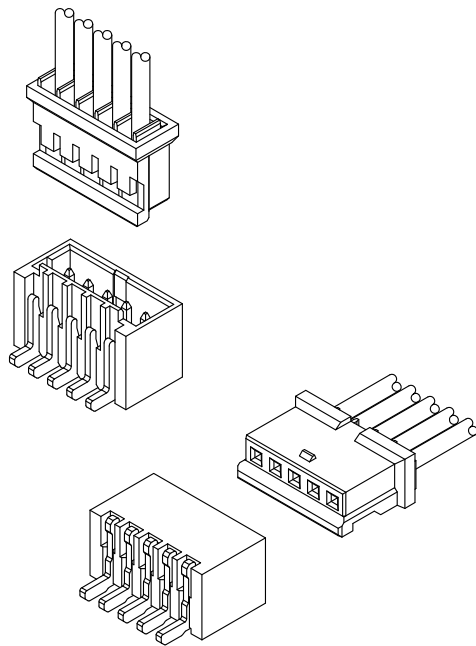

- Secure locking structure
- Low insertion force
- Suction area for picking up
- Improvement of engagement with prying

Specifications: _____

- Current rating: 3.0 A / AC,DC
- Voltage rating: 350 V AC/DC
- Temperature range: -25°C ~ +105°C
(including temperature rise in applying electrical current)
- Contact resistance: Initial value/ 20m Ω max
Insulation resistance: 1000 M Ω min
Withstanding voltage: 500 VAC/minute
Applicable wire: Conductor size/ AWG#28~#24
Insulation O.D./ 0.60 to 1.10 mm

- * Compliant with RoHS2/ REACH/ HF
- * Refer to "General Instruction and Notice when using Terminals and Connectors"
- * Contact CSG for details


Material: _____

Housing: PA66/UL94-V0;Color:White

Terminal: Phosphor/ Tin-plated

SMT Wafer Housing: LCP,UL94-V0;Color:Natural

SMT Wafer Pin: Brass/ Tin-plated




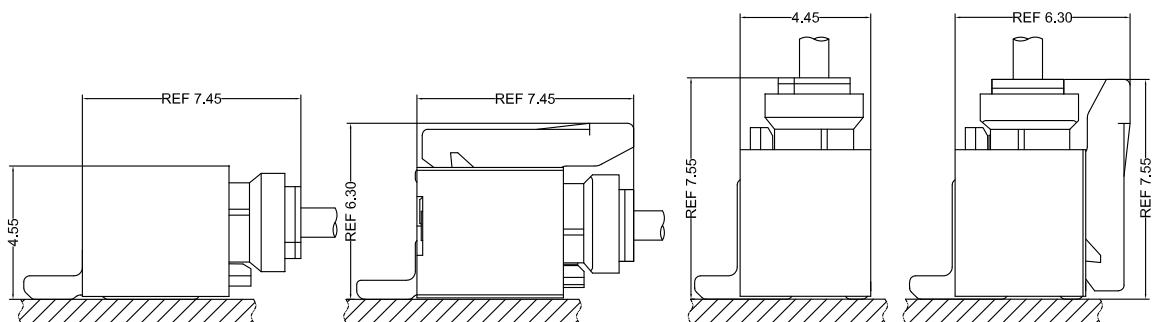


- Note: 1. The above figure is the figure viewed from the connector mounting side.
2. Tolerances are non-cumulative: ± 0.08 mm for all centers.
3. The dimensions above should serve as a guideline. Contact CSG for details.

CSG










Tel: +86-769-85312070 85375507 E-mail: James@cs-g-china.com www.cs-g-china.com

A1501 87439

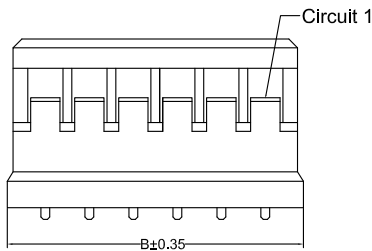

A1501HF 0XX AA P6 9 079
PIN
005=5PINS
SPECIAL
AA=NO Special
Material
P6=PA66 94V-0
Code
079
Color
9=White

CSG PART NO.	Dimension mm		Q'ty/BAG
	A	B	
A1501HF002AAP69079	1.50	4.10	1000PCS
A1501HF003AAP69079	3.00	5.60	1000PCS
A1501HF004AAP69079	4.50	7.10	1000PCS
A1501HF005AAP69079	6.00	8.60	1000PCS
A1501HF006AAP69079	7.50	10.10	1000PCS
A1501HF007AAP69079	9.00	11.60	1000PCS
A1501HF008AAP69079	10.50	13.10	1000PCS
A1501HF009AAP69079	12.00	14.60	1000PCS
A1501HF010AAP69079	13.50	16.10	1000PCS
A1501HF011AAP69079	15.00	17.60	1000PCS
A1501HF012AAP69079	16.50	19.10	1000PCS
A1501HF013AAP69079	18.00	20.60	1000PCS
A1501HF014AAP69079	19.50	22.10	1000PCS
A1501HF015AAP69079	21.00	23.60	1000PCS




A1501HF 0XX AK P6 9 168
PIN
005=5PINS
SPECIAL
AK=BUCKLE
Material
P6=PA66 94V-0
Code
168
Color
9=White



CSG PART NO.	Dimension mm		Q'ty/BAG
	A	B	
A1501HF002AKP69168	1.50	4.10	1000PCS
A1501HF003AKP69168	3.00	5.60	1000PCS
A1501HF004AKP69168	4.50	7.10	1000PCS
A1501HF005AKP69168	6.00	8.60	1000PCS
A1501HF006AKP69168	7.50	10.10	1000PCS
A1501HF007AKP69168	9.00	11.60	1000PCS
A1501HF008AKP69168	10.50	13.10	1000PCS
A1501HF009AKP69168	12.00	14.60	1000PCS
A1501HF010AKP69168	13.50	16.10	1000PCS
A1501HF011AKP69168	15.00	17.60	1000PCS
A1501HF012AKP69168	16.50	19.10	1000PCS
A1501HF013AKP69168	18.00	20.60	1000PCS
A1501HF014AKP69168	19.50	22.10	1000PCS
A1501HF015AKP69168	21.00	23.60	1000PCS

CSG

A1501 87439

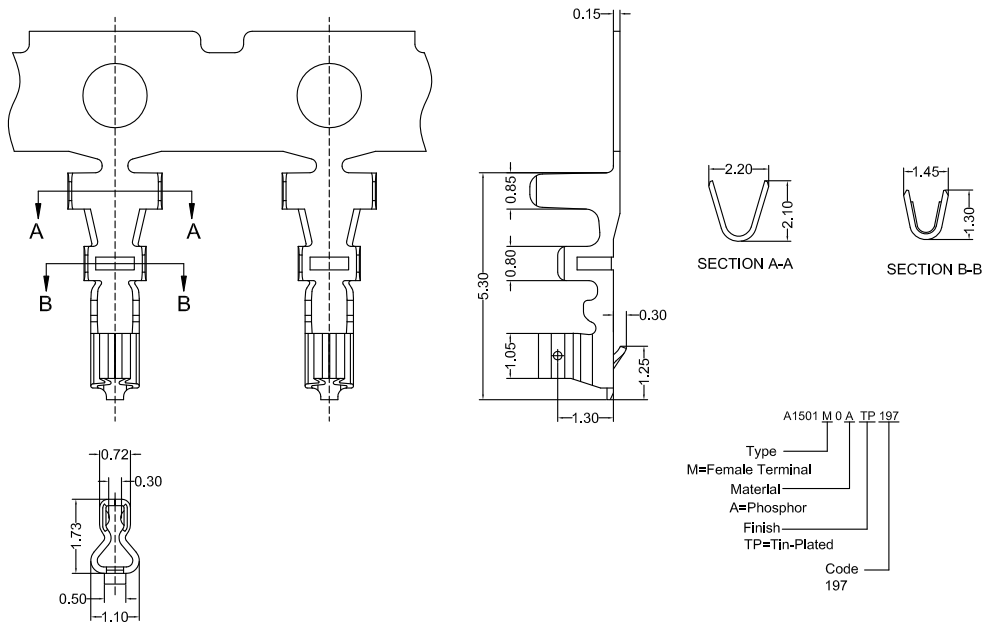

CSG PART NO.	Wire Range	Insulation O.D.	Q'ty/Reel
A1501M0ATP197	AWG#24-#28	1.10mm(max)	10000PCS

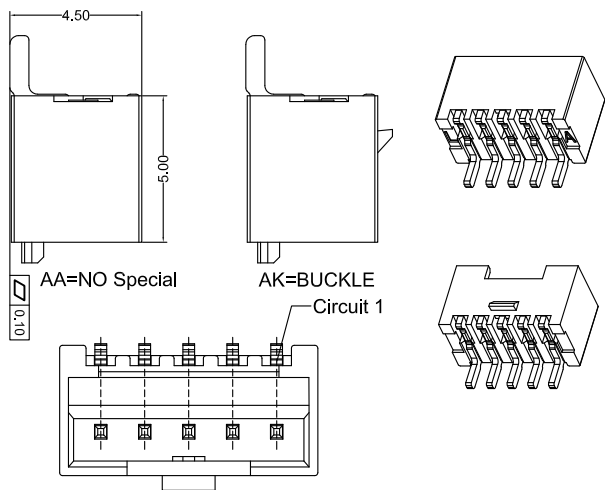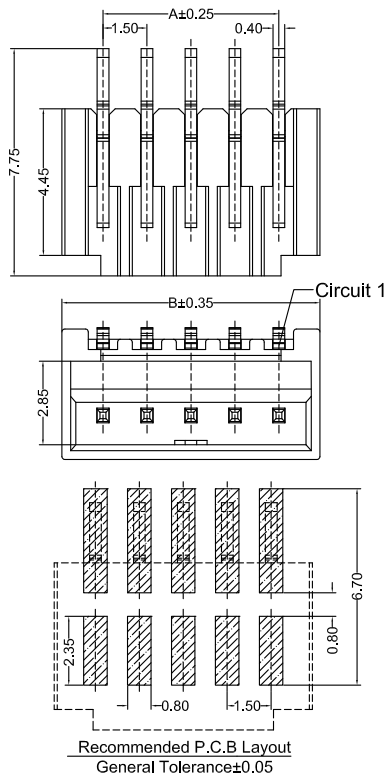

A1501RS 0XX AX LP TP B A 112
PIN
005=5PINS
SPECIAL
AA=NO Special
AK=BUCKLE
Material
LP=LCP 94V-0
Finish
TP=Terminal Tin-Plated

Code
112
Color
A=Natural
Packing
B=Tape & Reel

CSG PART NO.	Dimension mm		Q'ty/Reel
	A	B	
A1501RS002AXLPTPBA112	1.50	4.30	1000PCS
A1501RS003AXLPTPBA112	3.00	5.80	1000PCS
A1501RS004AXLPTPBA112	4.50	7.30	1000PCS
A1501RS005AXLPTPBA112	6.00	8.80	1000PCS
A1501RS006AXLPTPBA112	7.50	10.30	1000PCS
A1501RS007AXLPTPBA112	9.00	11.80	1000PCS
A1501RS008AXLPTPBA112	10.50	13.30	1000PCS
A1501RS009AXLPTPBA112	12.00	14.80	1000PCS
A1501RS010AXLPTPBA112	13.50	16.30	1000PCS
A1501RS011AXLPTPBA112	15.00	17.80	1000PCS
A1501RS012AXLPTPBA112	16.50	19.30	1000PCS
A1501RS013AXLPTPBA112	18.00	20.80	1000PCS
A1501RS014AXLPTPBA112	19.50	22.20	1000PCS
A1501RS015AXLPTPBA112	21.00	23.80	1000PCS

CSG

A1501 87439

